


Sharp edges - Square corners - Timeless

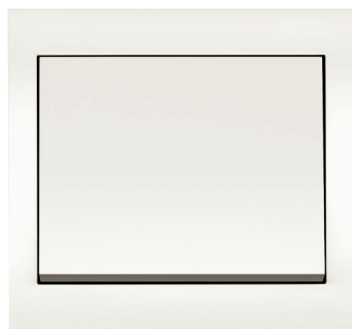

With clear contours and the deliberate renunciation of all other design attributes, the Berker K.1's straight-lined balance gives any room a timeless character.

The modular system structure of Berker products means that all K.1 covers fit onto the corresponding inserts for the standard and surface ranges. From a simple light switch to intelligent building management systems – with Berker you will find the solution to suit your needs.

Design features

- Rectangular basic form with sharp-edged corners, rounding radius 0,3 mm
- Flat geometry

Insert materials

- Aluminium, metal, plastic

Surface materials

- Plastic (thermoplastic), glossy or matt lacquered
- Polar white – similar to RAL 9010, lacquered anthracite – similar to RAL 7021, (other colors available upon customisation)
- Break-proof and impact-resistant
- Halogen-free and UV-resistant

Standard Applications

Rocker switches




	(1gang) on/off 1	Series, Double change-over (2gang on/off)	3gang on/off	2pole on/off with red lens and imprint "0" ¹	Push-button with lens and imprinted symbol bell ¹
Modular product concept:					
Rocker(s)	1405 70 ..	1435 70 ..	1465 70 ..	1417 71 ..	1415 70 ..
Frame 1gang	1313 70 ..	1313 70 ..	1313 70 ..	1313 70 ..	1313 70 ..
Insert	3031, 3036, 3037	3035, 3038 08	6330 23	3032, [5230 32 13] ²	5031
Neon lamp unit/ incandescent lamp unit--		--	--	1675.., 1676.., [1600 20] ²	1675.., 1676..
Rated voltage	250 V~	250 V~	400 V~	250 V~	250 V~
Rated current	10 AX	10 AX	16 AX	10 AX, [20 A] ²	10 A
Connection	Plug-in terminals	Plug-in, screw terminals	Screw terminals	Plug-in, [screw] ² terminals	Plug-in terminals
Safety regulations:	IEC/EN 60669-1, VDE 0632 Teil 1, GB 16915, SS 227: Part 1	IEC/EN 60669-1, VDE 0632 Teil 1, GB 16915, SS 227: Part 1	IEC/EN 60669-1, VDE 0632 Teil 1, GB 16915, SS 227: Part 1	3032: IEC 60669-1, VDE 0632 Teil 1, GB 16915, [SS 227: Part 1] ²	IEC/EN 60669-1, VDE 0632 Teil 1, GB 16915, SS 227: Part 1
Certifications:	VDE, KEMA, SEMKO, ÖVE, CEBC, BBJ, LCIE, KSA, CCC, PSB	VDE, KEMA, SEMKO, ÖVE, CEBC, BBJ, LCIE, KSA, CCC, PSB	VDE, KEMA, SEMKO, ÖVE, CEBC, BBJ, LCIE, KSA, CCC, PSB	VDE, KEMA, SEMKO, ÖVE, CEBC, BBJ, LCIE, KSA, CCC, [PSB] ²	VDE, KEMA, SEMKO, ÖVE, CEBC, BBJ, LCIE, KSA, CCC, PSB
Application	On/off, change-over, intermediate switching	Series switching, double change-over switching	Triple on/off switching	Monitoring circuit	Push-button switching

¹ IP44 splash-protected mounting possible in conjunction with a separate sealing set

² Only available in Sire


Frames

- Further dimensions, frames horizontal (W x H = 80,5 mm):
W = 229 mm, 3gang
W = 300 mm, 4gang
W = 371 mm, 5gang
- Further dimensions, frames vertical (W = 87 mm x H):
H = 151,5 mm, 2gang
H = 222,5 mm, 3gang
H = 293,5 mm, 4gang
H = 364,5 mm, 5gang
- Horizontal multiple combination frames designed without visible intermediate webs

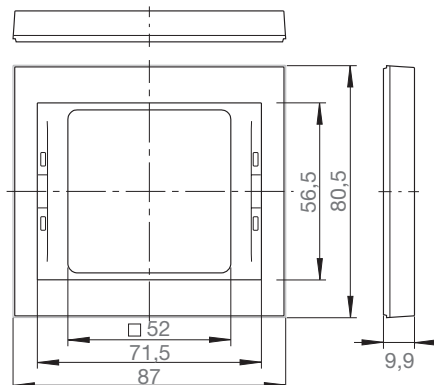

Rockers/Covers


- Dimensions (W x H): 71,5 x 56,5 mm
- Variants with labelling field available
- Variants with wear-resistant labelling available

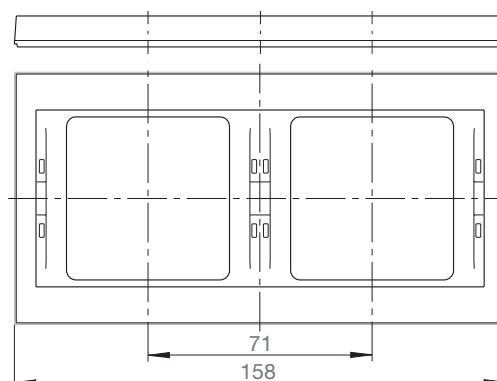

Wall Boxes

- Plastic, black, order no.: 33 1870, dimensions (W x H x D): 75 x 67,7 x 42 mm
- Metal, order no.: 33 1873, dimensions (W x H x D): 71 x 67,5 x 48,5 mm

Standard Applications



	Rotary dimmer with soft-lock	Blind rockers switch with imprinted symbol arrow	SCV/TV Outlet	FCC socket outlet 8pole	FCC socket outlet 8/8pole
--	------------------------------	--	---------------	-------------------------	---------------------------

Modular product concept:

Rockers/Covers	1135 70 ..	1435 71 ..	1045 70 ..	1170 70 .. for supporting plate 4540 .. 1313 70 ..	1182 70 .. for supporting plate 4541 .. 1313 70 ..
Frame 1gang	1313 70 ..	1313 70 ..	1313 70 ..	Modular jacks of commercial standard according to requirements	Modular jacks of commercial standard according to requirements
Insert	2885	3035 20	F81		
Rated voltage	230/240 V~, 50/60 Hz	250 V~	--	--	--
Rated current	--	10 A	--	--	--
Connection	Screw terminals	Plug-in terminals	F81 terminal	--	--
Special feature	Rated power: 100–1000 W	Mechanical and electrical interlocking of rockers	Analogue and digital transmission	Dependent to used jacks	Dependent to used jacks
Safety regulations:	DIN EN 60669-1 (VDE 0632 Teil 1), DIN EN 60669-2-1 (VDE 0632 Teil 2-1), SS 227: Part 1	IEC/EN 60669-1, VDE 0632 Teil 1, GB 16915,	IEC 60169-24	--	--
Certifications	VDE, ÖVE, KSA	VDE, KEMA, SEMKO, ÖVE, CEPEC, BBJ, CCC	StarHub Limited		
Application	Setting brightness in steps, change-over switching	Switching motors of blinds	Connection to SAT-cable, DVB-T-TV and radio systems	Connection to internet and PC network via RJ45 plug	Connection to internet and PC network via RJ45 plug