

13A Switched Socket Outlet for British Standard




The Berker switched socket outlet for British Standard is covered with centre plates of the switch ranges S.1/B.3/B.7, K.1/K.5 and Q.1/Q.3. The socket outlets are suitable for installation in combinations (frames up to 5gang with appropriate distance of wall boxes).


The frame is fixed by means of the centre plate, which is snapped easily onto the insert in small steps. Irregularities on the wall can be compensated for in this manner. No bolted joints are necessary. Due to its lateral position the rocker switch can be operated permanently, even when a plug or adapter is connected. It is possible to remove the centre plate and frame, e.g. for renovation work, without disconnecting the electrical supply.

Application Features

- simple wiring thanks to stable, easily-accessible screw terminals for conductors up to 4 mm²
- enhanced contact protection via integrated slider for optimal safety
- screw fastening via the supporting ring for universal installation in solid or hollow walls



polar white
33 4202 19




anthracite
33 4202 16

Berker
S.1
B.3/B.7 Glas




polar white, matt
33 1307 99 09

Berker
S.1
B.3/B.7 Glas



anthracite, matt
33 1307 16 06




aluminium, matt
33 1307 14 04

Berker
K.1/K.5




polar white, glossy
33 1307 70 09


Berker
K.1/K.5



anthracite, matt
33 1307 70 06



aluminium
33 1307 70 24



stainless steel, laquered
33 1307 70 04

Berker
Q.1/Q.3




polar white, velvety
33 1307 60 89


13A Switch Socket Outlet for British Standard




Scale Drawings

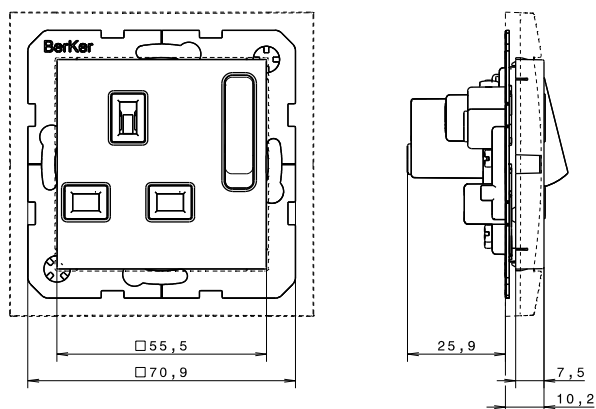

Insert with cover plate Berker S.1, B.3, B.7 Glas

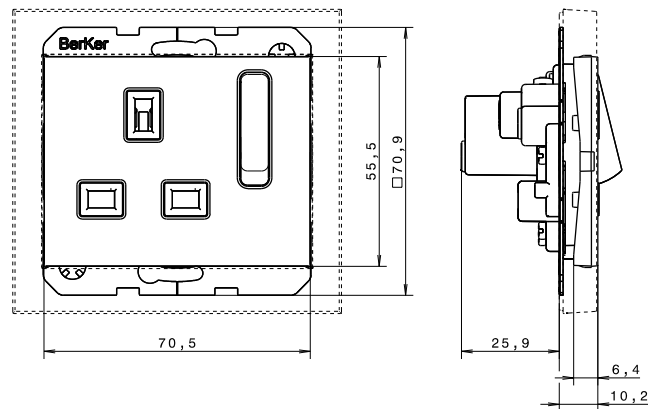

Insert with cover plate Berker K.1/K.5

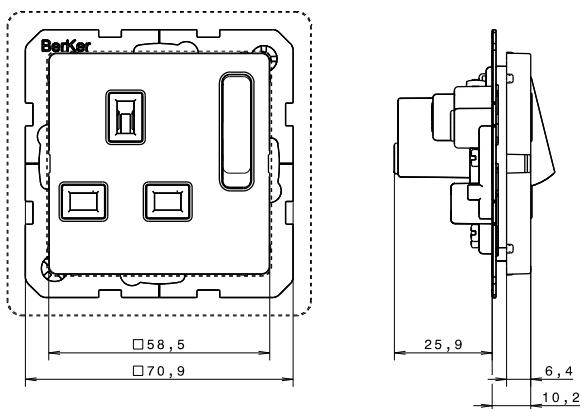

Insert with cover plate Berker Q.1

Technical Data

Switched socket outlet for British Standard	Order no. 33 4202 1..
Design	2pole + earth
Rated current	13 A
Rated voltage	250 V~
Conductor cross-section	4 mm ²
Material of centre plate	ASA/ABS
Material of contacts	Bronze
Certification	BS 1363-2, MS589, SS 145